

Nitric Oxide (NO) Analog Gas Transmitters



DESCRIPTION

Microprocessor-based analog gas transmitter for the detection of nitric oxide (NO) in the ambient air.

APPLICATION

To sense nitric oxide (NO) in a wide variety of commercial and industrial applications such as manufacturing equipment rooms, machine and engine repair shops, and ventilation systems, etc. and transmit to any compatible electronic analog control, DDC/PLC control or automation system.

FEATURES

- Continuous monitoring
- (0)4-20 mA, (0)2-10 VDC output, selectable
- Polarity protected
- Two-stage relay output control, optional
- Digital display, optional
- Electrochemical gas sensor, gas specific
- Temperature compensated
- Easy plug-in sensor
- RFI/EMI protected
- Modular plug-in technology
- Easy maintenance



NRTL Certification to STD
UL 61010-1
"Pending"

SPECIFICATIONS

Electrical

Power supply	24 VAC ± 15%, 50/60 Hz, or 17-28 VDC, polarity protected
Power consumption	22 mA (0.6 VA), max.
- w/relay package	35 mA (1.0 VA), max.
- w/heater	235 mA (6 VA), max.
RFI/EMI protection	5.0 W @ 1 ft. (0.31 m) radiated

Sensor Performance

Gas detected	Nitric Oxide (NO)
Sensor element	Electrochemical, diffusion
Range	Span selectable from 0-50 to 0-100 ppm via calibration, 0-50 ppm factory set
Stability & resolution	± 0.5 ppm of reading
Repeatability	± 2% of reading
Long term output drift	< 2% signal loss/month
Response time	t90 < 25 sec.
Sensor life expectancy	3 years, normal operating environment
Sensor coverage	4,000 sq.ft., max. 6,000 sq.ft. (372 m ² , max. 558 m ²), under "ideal conditions"

Installation Location

Mounting height	1 to 3 ft (0.3 to 1.0 m) below ceiling
-----------------	--

Type of Control

General	Continuous proportional analog sensor signal output
---------	---

Analog output

(0)4-20 mA, load < 500 Ω;
(0)2-10 VDC, load > 50K Ω;
jumper selectable, polarity protected
(2) relays, potential free

Optional contact outputs

Environmental

Permissible ambient
- working temperature 14°F to 104°F (-10°C to 40°C)
- storage temperature -4°F to 104°F (-20°C to 40°C)
- humidity 15 to 95% RH, non-condensing
- working pressure Atmospheric ± 10%

Physical

Enclosure, standard
- material Galvanized steel w/zinc coating, corrosion resistant
- color Light gray
- protection NEMA 1 (IP 42), general purpose
- installation Wall (surface) mounted, or single gang electrical box

Dimensions (H x W x D)

5.59 x 5.59 x 2.48 in. (142 x 142 x 63 mm)

Cable entry

1 hole for 1/2 in. conduit for wall (surface) mounting, and 1 hole on back side of base plate for single gang electrical box mounting

Wire connection

Terminal blocks, screw type for lead wire

SPECIFICATIONS

Physical (cont...)	
Wire size	Min. 24 AWG (0.25 mm ²), Max. 14 AWG (2.5 mm ²)
Wire distance	Max. loop resistance 450 Ω (= wire resistance plus controller input resistance)
Weight	0.7 lbs. (0.3 kg)
Calibration	Adjustment via onboard zero and gain potentiometers
Approvals/Listings	
- unit rating	NRTL Certification to STD ANSI/UL 61010-1 – “Pending” CE EMV-Compliance 2004/108/EWG, low voltage directives 73/23/EWG
Warranty	
	Two years material and workmanship, 12 months normal exposure for sensor element

OPTIONS


Digital Display	Liquid crystal display “LCD”, w/o backlight, two lines, 16 characters, 1/10 digit resolution
Display	NO ppm values
Permissible ambient	
- working temperature	-4°F to 158° (-20°C to 70°C)
Enclosures	
Duct mounted “1”	NEMA 3 (IP 45)
- w/probe	7/8 in. (22 mm) diameter and 7.16 in. (182 mm) length
- cable entry	1 hole for 1/2 in. conduit
Wall mounted “A”	NEMA 12 (IP 55)
- material	Polycarbonate, UL 94-HB, fire-retardant
- conformity	UL 50
- color	Light gray
- installation	Wall (surface) mounted, or single gang electrical box
- dimensions (H x W x D)	5.12 x 3.70 x 2.25 in. (130 x 94 x 57 mm)
- cable entry	1 hole for 1/2 in. conduit for wall (surface) mounting, and 1 hole on back side of base plate for single gang electrical box mounting
- enclosure approval	UL Listed, E208470 CSA Certified, E208470

OPTIONS

Wall mounted “C”	NEMA 4X (IP65)
- material	Polycarbonate, UL 94-HB, fire-retardant
- conformity	UL 50
- color	Light gray
- gas inlet	Special moisture filter protection
- installation	Wall (surface) mount
- dimensions (H x W x D)	5.12 x 5.12 x 2.95 in. (130 x 130 x 75 mm)
- cable entry	(1) PG 13.5 compression fitting, removeable, hole fits 1/2 in. conduit conductor
- enclosure approval	UL Listed, E208470 CSA Certified, E208470
Wall mounted “4”	NEMA 4X (IP 65), w/splash guard
- material	ABS UL94V0
- color	Light gray
- installation	Wall (surface) mounted
- dimensions (H x W x D)	4.80 x 4.72 x 3.42 in. (122 x 120 x 87mm)
- cable entry	(1) PG 13.5 compression fitting, removeable, hole fits 1/2 in. conduit conductor
Relay Package	
Type	(1) SPDT (R1), and (1) SPST-NC or SPST-NO (R2), jumper selectable
Contact rating	30 VAC/VDC, 0.5 A, max.
Setpoint (factory set)	Lo/SPDT = 25 ppm* Hi/SPST = 45 ppm*
Switching differential (factory set)	10 ppm* * other values on special request at time of ordering
Relay mode (factory set)	De-energized for each relay, energized (fail-safe) mode on special request
Status indicator	(2) LEDs, one for each relay
Relay approval	UL Recognized, E41515 CSA, C22.2 No. 0, No. 14 (File No. LR31928)
Heater, built-in	
Ambient temperature	For low temperature environment -40°F (-40°C)
Power consumption	0.2 A (5 VA), max.
Thermostatic control	32°F (0°C) ± 5°F (3°C)


ORDERING INFORMATION

AT-1129 - 0 - 000 - 1 (Product label "AT-1129-x-xxx-x V3")

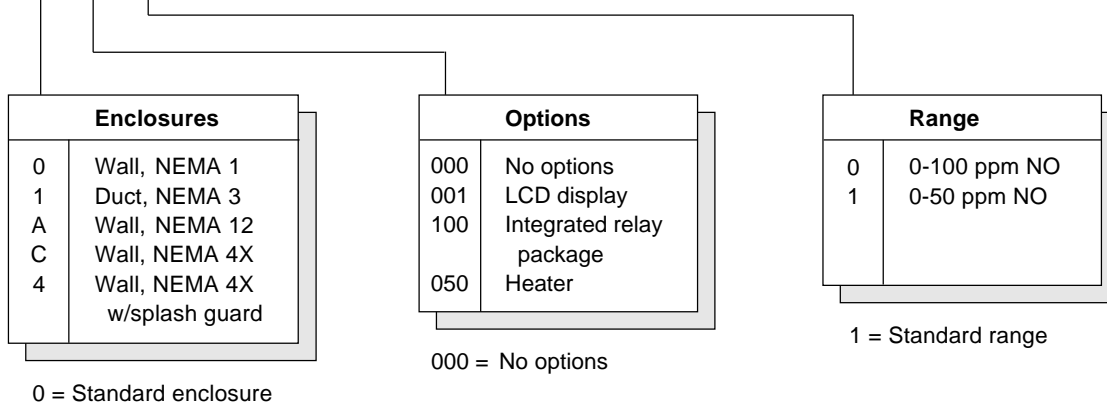


WIRING CONFIGURATION


AT-1129
4-20 mA signal, 2-wire, loop-powered, 24 VDC

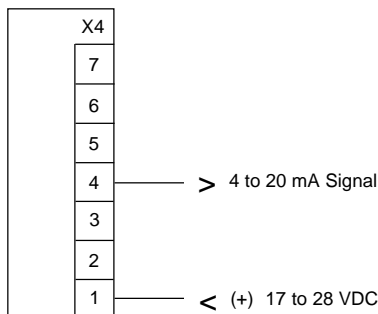

AT-1129
(0)2-10 VDC signal, 3-wire, 24 VAC or 24 VDC

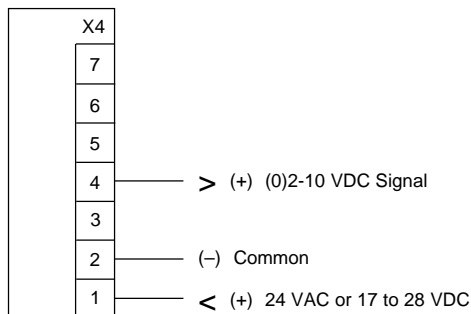

AT-1129
(0)4-20 mA signal, 3-wire, 24 VAC or 24 VDC**

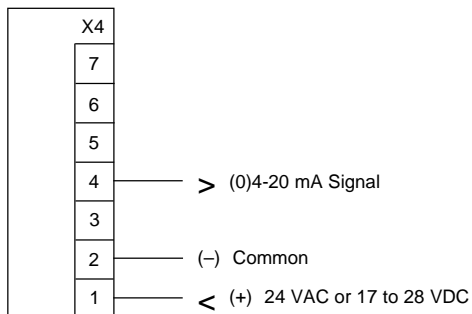

Jumper output signal range selectors:

- V-A Over both pins = VDC
Pins not covered = mA
- 0-20% Over both pins = 4-20 mA / 2-10 VDC
Pins not covered = 0-20 mA / 0-10 VDC


Notes:

2-wire loop-powered wire configuration allow only 4-20 mA signal.

Signal range jumper selection:

- V-A Pins not covered
- 0-20% Pins both covered

Optional relay package
(0)4-20 mA signal, 3-wire, 24 VAC or 24 VDC**

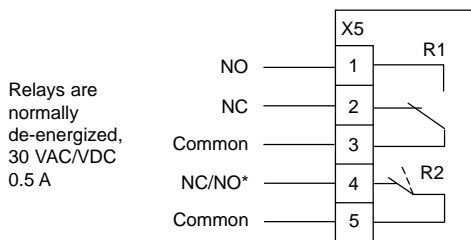

**** For (0)4-20 mA signal with optional relay package, LCD and/or heater, the 3-wire configuration must be applied.**

Twisted, shielded wire is recommended for 2- or 3-wire configurations.

Shield should be grounded only at the controller. DO NOT ground shield at both ends!

With optional heater:

The wiring must be sized appropriately for a power of 0.3 A, 24 VDC.

*Jumper SPST relay NC/NO selector:

- NC Covers top two pins = SPST-NC
- NO Covers bottom two pins = SPST-NO

Note: *When using AT-1129 transmitter w/relay package as a stand-alone unit (no connection to a controller), pins on jumpers "V-A" and "0-20%" must be covered.*

See Jumper output signal range selectors.