

## Product Data

**I-100KS Series**  
**I-10KS Series**  
**I-2252 Series**  
**I-10KCSI Series**  
**I-5K Series**  
 Temperature Sensor

### Product Description

The I-100KS, I-10KS, I-2252, I-10KCSI and I-5K Series temperature sensors are thermistor type sensors. These sensors provide a predictable output over a specified temperature range to meet each manufacturer's required input values. (See web page for complete curve chart specifications)

These units are offered in Room, Room with Set Point, Room with Override, Room with Setpoint and Override, and Room w/ Setpoint, Override, and RJ11 Jack, Duct and Duct without Box, Immersion, Stainless Plate, Raw, Bendable Copper and Stainless Steel Rigid Averaging, Strap-On, Bullet Probe, Button Sensor, and Outdoor Air Configurations.

All INTEC Room sensors may be ordered with an optional setpoint (see chart on the following page), override or with a 4 pin RJ11 or 6 pin RJ12 communication jack with terminal blocks, for remote programming. These units are also available with a 1/8" RS232 Stereo Jack.

### Product Specifications

<b>Output</b>	100K Ohms @ 77°F (25°C) S 10K Ohms @ 77°F (25°C) S 2252 Ohms @ 77°F (25°C) 10K Ohms @ 77°F (25°C) CSI 5000 Ohms @ 77°F (25°C)
<b>Operating Temperature Range</b>	-40 to 302°F (-40 to 150°C)
<b>Interchangeability</b>	+/- 0.2°C (+/-0.36°F)
<b>Power Dissipation Constant</b>	3 mW / °C
<b>Stability</b>	+/- 0.13°C (0.23°F)
<b>Accuracy (0 to 70°C)</b>	+/-0.2°C (+/-0.36 °F)
<b>Operating Humidity</b>	0 to 90% RH non-condensing
For sensors with Display option, see the <b>LCD Series</b> cut sheet	

## Thermistor



### Attributes

- Offer high accuracy and interchangeability over a wide temperature range.
- Higher resistance output relative to Platinum RTD's
- Non-polarity sensitive


### Applications

- OEM / Industrial
- Light Industrial
- DDC Systems


## I-100KS, I-10KS, I-2252, I-10KCSI and I-5K Thermistor Resistance - Temperature Chart

		I-100KS	I-10KS	I-2252	I-10KCSI	I-5K
Temperature		Resistance				
°C	°F	Ohms	Ohms	Ohms	Ohms	Ohms
-40	<b>-40</b>	3,364,500	336,450.0	75,769.0	337,200.0	168,225.0
-35	<b>-31</b>	2,426,600	242,660.0	54,647.0	243,180.1	121,330.0
-30	<b>-22</b>	1,769,600	176,960.0	39,851.0	177,304.0	88,480.0
-25	<b>-13</b>	1,304,100	130,410.0	29,368.0	130,632.8	65,205.0
-20	<b>-4</b>	970,720	97,072.0	21,861.0	97,214.5	48,536.0
-15	<b>5</b>	729,510	72,951.0	16,429.0	73,040.9	36,476.0
-10	<b>14</b>	553,260	55,326.0	12,459.0	55,383.2	27,663.0
-5	<b>23</b>	423,260	42,326.0	9,532.0	42,363.7	21,163.0
0	<b>32</b>	326,500	32,650.0	7,353.0	32,677.8	16,325.0
5	<b>41</b>	253,910	25,391.0	5,718.0	25,409.6	12,696.0
10	<b>50</b>	198,990	19,899.0	4,481.0	19,910.5	9,950.0
15	<b>59</b>	157,110	15,711.0	3,538.0	15,716.8	7,856.0
20	<b>68</b>	124,920	12,492.0	2,813.0	12,494.3	6,246.0
25	<b>77</b>	100,000	10,000.0	2,252.0	10,000.0	5,000.0
30	<b>86</b>	80,570	8,057.0	1,814.0	8,055.7	4,028.0
35	<b>95</b>	65,310	6,531.0	1,471.0	6,530.0	3,266.0
40	<b>104</b>	53,260	5,326.0	1,200.0	5,325.0	2,663.0
45	<b>113</b>	43,680	4,368.0	983.8	4,367.3	2,184.0
50	<b>122</b>	36,020	3,602.0	811.2	3,601.6	1,801.0
55	<b>131</b>	29,860	2,986.0	672.5	2,985.9	1,493.0
60	<b>140</b>	24,880	2,488.0	560.3	2,488.2	1,244.0
65	<b>149</b>	20,830	2,083.0	469.0	2,083.5	1,041.0
70	<b>158</b>	17,520	1,752.0	394.5	1,752.9	875.8
75	<b>167</b>	14,790	1,479.0	333.1	1,481.5	739.7
80	<b>176</b>	12,550	1,255.0	282.7	1,257.5	627.6
85	<b>185</b>	10,700	1,070.0	240.9	1,071.9	534.9
90	<b>194</b>	9,154	915.4	206.2	917.4	457.7
95	<b>203</b>	7,866	786.6	177.1	788.2	393.3
100	<b>212</b>	6,786	678.6	152.8	679.8	339.3
105	<b>221</b>	5,876	587.6	132.3	588.4	293.8
110	<b>230</b>	5,106	510.6	115.0	511.1	255.3
115	<b>239</b>	4,452	445.2	100.3	445.5	222.6
120	<b>248</b>	3,896	389.6	87.7	389.5	194.8
125	<b>257</b>	3,419	341.9	77.0	341.6	171.0
130	<b>266</b>	3,010	301.0	67.8	300.6	150.5
135	<b>275</b>	2,658	265.8	59.9	265.2	132.9
140	<b>284</b>	2,354	235.4	53.0	234.7	117.7
145	<b>293</b>	2,090	209.0	47.1	208.3	104.5
150	<b>302</b>	1,861	186.1	41.9	185.3	93.0

## Room

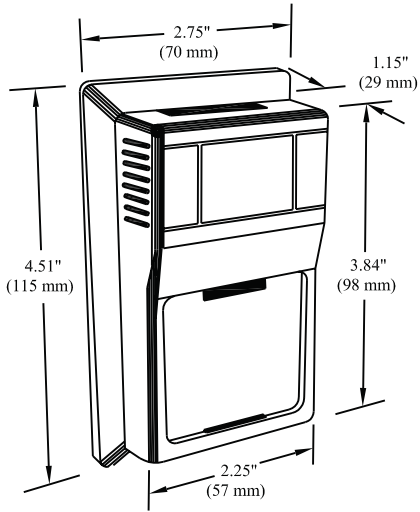

## Duct/Bendable & Rigid Averaging

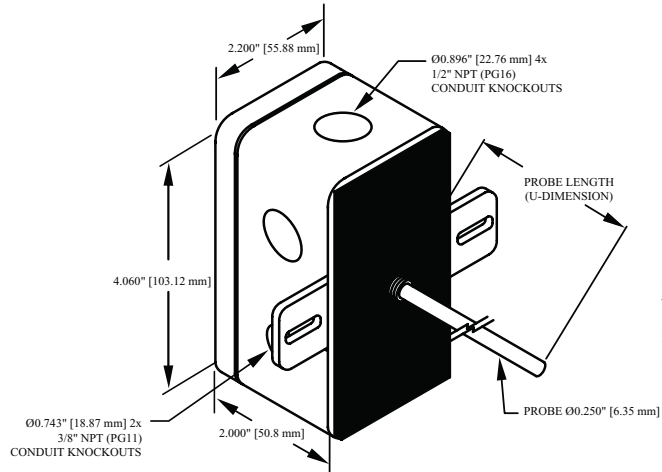

### Duct Insertion (U-Dimension)

- 5.5" (89 mm)
- 7.5" (191 mm)
- 11.5" (292 mm)
- 17.5" (445 mm)


### Bendable Averaging

- 8' (2.4 m)
- 12' (3.7 m)
- 24' (7.3 m)


### Rigid Averaging

- 17.625" (448mm)
- 23.625" (600 mm)
- 35.625" (905mm)


## Duct without Box

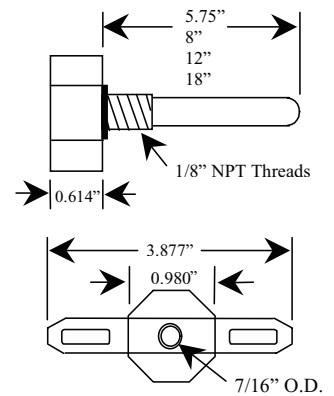


## Outside Air

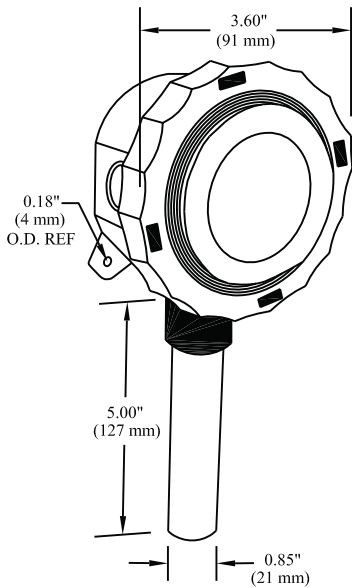

## Stainless Plate

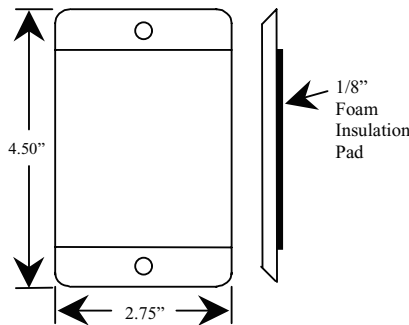


## Immersion

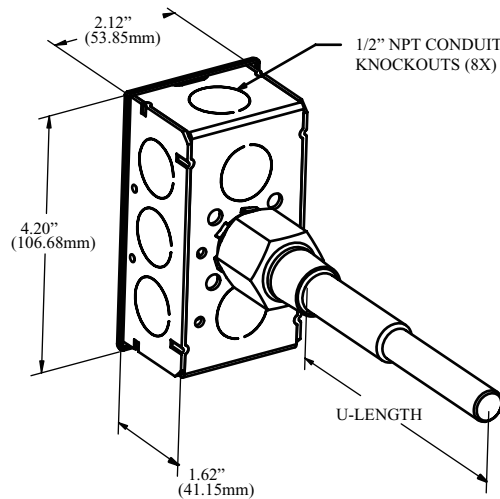


### Well Insertion (U-Length)

- 2.50" (64 mm)
- 4.00" (102 mm)
- 6.25" (158.75 mm)


## Bullet Probe




## Button Sensor

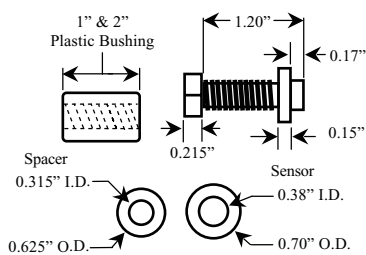

## Strap-On

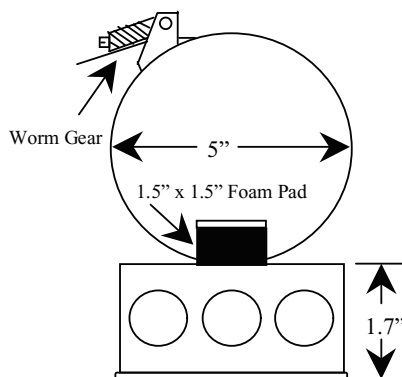

## Thermowell

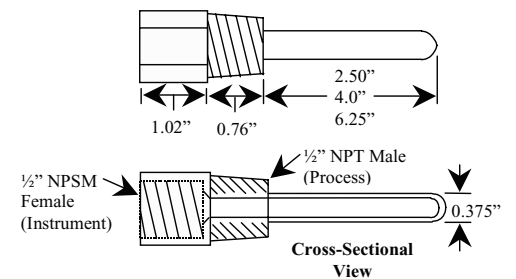

# Ordering Information

<p>Sensor</p> <p>I- [ ]</p> <p>↑</p> <p><b>100KS</b>  <b>10KS</b>  <b>2252</b>  <b>10KCSI</b>  <b>5K</b></p>	<p>Configuration</p> <p>-[ ]</p> <p>↑</p> <p><b>R</b> - Room  <b>RS</b> - Room w/ Setpoint***  <b>RO</b> - Room w/ Override  <b>RSO</b> - Room w/ Setpoint &amp; Override***  <b>D</b> - Duct 4", 8", 12", 18"  <b>DO</b> -Duct without box 4", 8", 12", 18"  <b>I</b> - Immersion 2.5", 4", 6"  <b>A</b> - Bendable Copper Averaging 8', 12', 24'  <b>FA</b> - Flexible Averaging Cable, 8', 12', 24'  <b>RA</b> - Rigid Averaging 18", 24", 36"  <b>S</b> - Strap On  <b>O</b> - Outdoor Air  <b>RP</b> - Remote Probe w/6' Leads  <b>SP</b> - Stainless Plate  <b>BP</b> - Bullet Probe  <b>W</b> - Raw  <b>W-6'</b> - Raw Sensor w/6'Leads  <b>BBS</b> - Brass Button Sensor  <b>SBS</b> - Stainless Button Sensor</p>	<p>Communication Jack<sup>1</sup></p> <p>-[ ]</p> <p>↑</p> <p><b>J4</b> (4 Pin RJ11)  <b>J6</b> (6 Pin RJ12)  <b>S232</b> (Stereo Jack)</p>	<p>Display<sup>1</sup></p> <p>-[ ]</p> <p>↑</p> <p>( ) No Display          (Standard)  <b>(L)</b> LCD Display          (Degrees F)  <b>(LC)</b> LCD Display          (Degrees C)</p>	<p>Housing Type<sup>2</sup></p> <p>-[ ]</p> <p>↑</p> <p>Add-On Options  <b>(BB)</b> NEMA 3R  <b>(4X)</b> NEMA 4X</p>
--	--	---	--	--

<sup>1</sup>These Options are only available on INTEC's Room Configurations.

<sup>2</sup>Standard Housing Types:

- Plastic Housing for Duct and Averaging sensors
- Galvanized Junction Box for Immersion and Strap-On sensors

Add-on option (BB) NEMA 3R housing is not available for Strap-On sensors


**RS / RSO** \*\*\* setpoint adjuster option requires additional ordering decisions for the following:

<p>Pot Value<sup>1</sup></p> <p>-[ ]</p> <p>↑</p> <p><b>400</b>  <b>1K</b>  <b>2K</b>  <b>3K</b>  <b>5K</b>  <b>8.5K</b>  <b>10K</b>  <b>20K</b>  <b>100K</b></p>	<p>Setpoint Indicator<sup>1</sup></p> <p>-[ ]</p> <p>↑</p> <p><b>Cool   Warm</b>  <b>55 to 85</b>  <b>10 to 30° C</b></p>	<p>Pot Action<sup>1</sup></p> <p>-[ ]</p> <p>↑</p> <p><b>DA</b> (Direct)  <b>RA</b> (Reverse)</p>
---	---	---

# Wiring Configuration

## Thermistor Temperature Sensor Types

- Duct • Immersion • Averaging
- Strap-On • Outdoor • Remote Probe
- Bullet Probe • Stainless Plate • Button Sensor

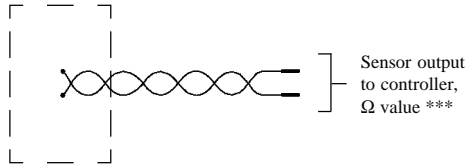


All non-room types are supplied with 22 AWG (0.34 mm<sup>2</sup>) lead wires and can be hooked up with any crimp style or wire nut wire connectors.

ill. 1

## Thermistor Temperature Room Sensors, without any options

Terminal connector block

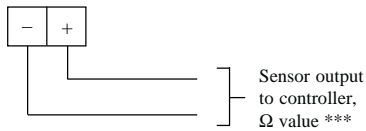

ill. 2


\*\*\* All sensor connections are **non-polarity** and **non-positive sensitive**.

\*\*\* It is recommended to use 18-22 AWG (0.75-0.34 mm<sup>2</sup>) twisted pair wires or shielded cable for all sensor installations.

## Thermistor Temperature Room Sensors with options:

- Tenant override
- Setpoint adjuster
- Communication jack


### Jumper Tenant Override Selector:




Override push-button SW1

- Shorten sensor, set jumpers vertically over both top pins (Factory set)
- Dry contact closure, set jumpers vertically over both bottom pins (requires separate wire connection to controller)

Terminal connector block

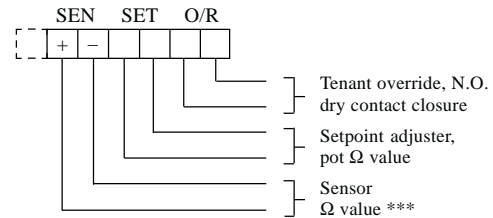


Outputs to Controller:

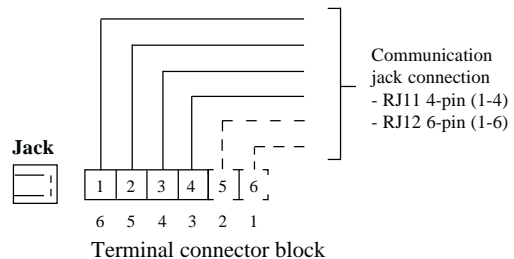


ill. 3

# Wiring Configuration

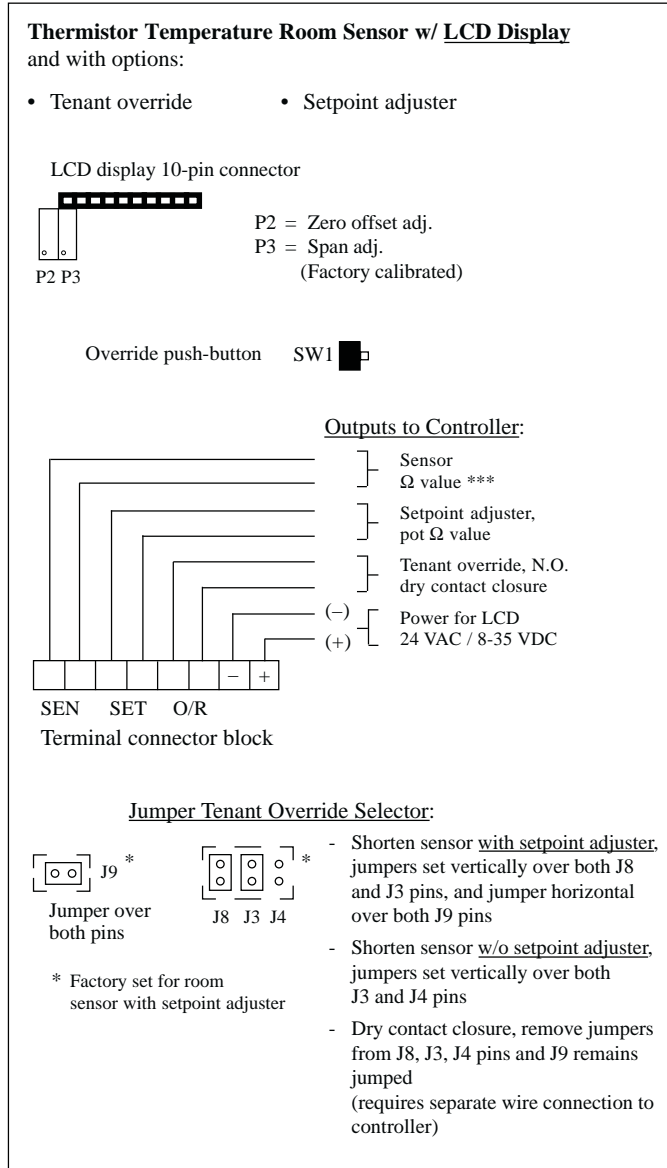

ill. 4

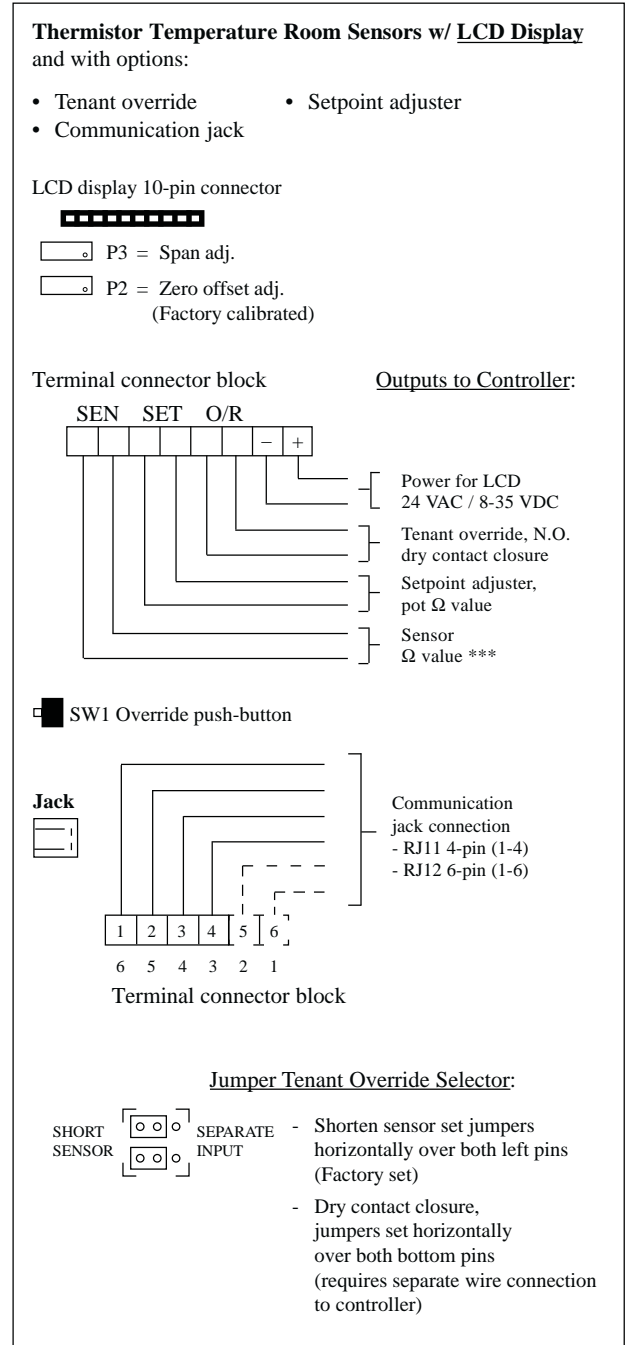

ill. 5