

*Thermometer Indicators*



**I/TI**



**Product Description**

The I/TI Thermometer Indicator incorporates a mineral spirits filled, glass bulb thermometer. This unit is available with either a mechanical switch or membrane type override button.

The I/TI is a wall mount room unit, which may incorporate any type of I/sensor. Both setpoint and override options are available upon request.

The setpoint options include a linear 400 Ohm, 1K, 2K, 5K, 8.5K, 10K, 20K, or 100K Ohm potentiometer. An optional series resistor allows for any offset value.

The setpoint may be ordered as either Direct Acting or Reverse Acting. The setpoint labels available are Cool|Warm, 55 to 85, and 10 to 30°C. Other setpoint labels may be available upon request.


The override options include a Normally Open switch in parallel with the sensor or a separate 2 pole terminal block for Tenant override.

**Product Specifications**

<b>Temperature Range</b>	50 to 90 °F	<b>Switch Resistance</b>	20 to 75 Ohms
<b>Accuracy</b>	+/- 1°F	<b>Mounting</b>	Adhesive Backing
<b>Switch Contact</b>	Normally Open	<b>Life Expectancy</b>	1,000,000 Contact Closures

**Dimensions**

**Room**

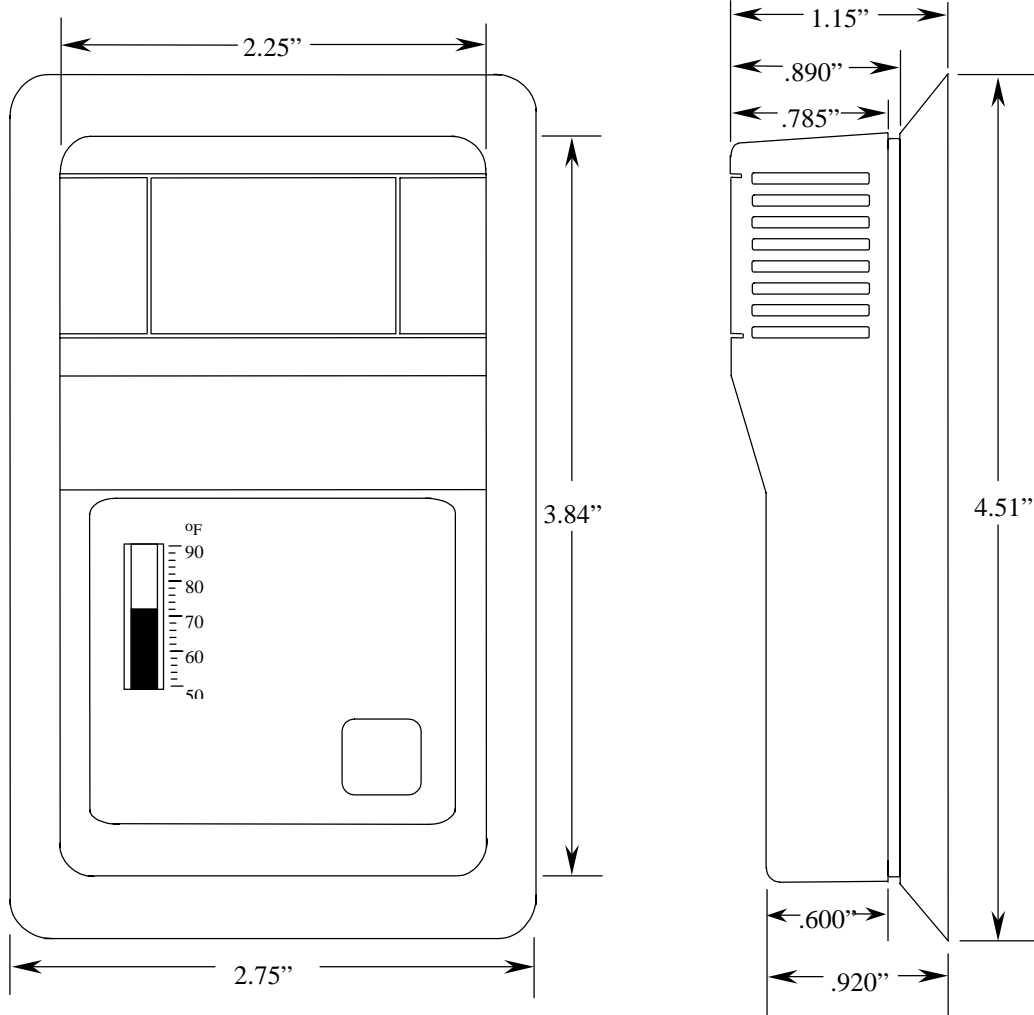

**Ordering Information**

I/TI -	Sensor [ ]	Configuration -[ ]	Pot Action -[ ]	Pot Value -[ ]	Setpoint Indication -[ ]
	↑	↑	↑	↑	↑
	<b>100</b>	<b>R - Room</b>	<b>DA (Direct)</b>	<b>400 Ohm</b>	<b>Cool/Warm</b>
	<b>1K</b>	<b>RS - Room w/ Setpoint</b>	<b>RA (Reverse)</b>	<b>1K</b>	<b>55 to 85</b>
	<b>2K</b>	<b>RO - Room w/ Override</b>		<b>2K</b>	<b>10 to 30°C</b>
	<b>2252</b>	<b>RSO - Room w/ Setpoint &amp; Override</b>		<b>5K</b>	<b>Specify</b>
	<b>3K</b>			<b>8.5K</b>	
	<b>ASI (3K-ASI)</b>			<b>10K</b>	
	<b>AN (10K-AN)</b>			<b>20K</b>	
	<b>CP (10K-CP)</b>			<b>100K</b>	
	<b>CSI (10K-CSI)</b>				
	<b>20K</b>				
	<b>100K</b>				

**Example:** I/TI-AN-RSO-DA-20K- 55 to 85 or I/TI-3K-R