

Description

The REE-2005 Relay Module is a voltage to current transducer designed for use with Digital controllers, or other building automation systems, to convert a 0-10 VDC control output signal into a 0-20 mA control output signal.


The REE-2005 can be surface or panel mounted, or can be installed in an electrical handy box. The REE-2005 can be powered by either 24 VAC or 24 VDC.

Features

- ◆ Converts 0 to 10 VDC control output signal into a 0 to 20 mA control output signal
- ◆ Simple installation

Specifications

Supply Voltage	24 VAC +20%/-15% or 22 to 40 VDC
Input Power	0.5 VA
Output Capacity	0 to 20 mA output (24 VAC supply) into 650Ω, max
Connections	Plated screw terminals
Wire Size	14 to 22 AWG, stranded
Material	ABS, UL Flame Class 94 HB
Weight	2 oz. (57 grams)
Temperature Limits	
Operating	40° to 120° F (4° to 49° C)
Shipping	-40° to 140° F (-40° to 60° C)

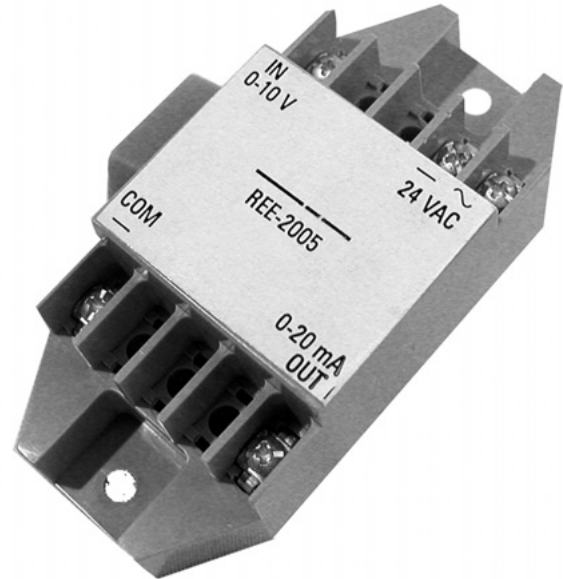

Details

All dimensions are in inches (mm)

